

BALL TRANSFER UNITS WITH FLANGE IN “ACETAL POM” RESIN (SP 15 – SP 22- SP 30 – SP 45)

This version of ball transfer unit is made of plastic material machined from bar, with dirt exit hole on the bottom. In order to grant a proper smoothness also in case of reduced loads and to avoid liquid absorption, this version is carried out without felt seal.


Main features:

Resistant to salt water and chemical substances. Non-magnetic and non-conductive.


Suitable for applications in chemical, pharmaceutical and medical fields, etc.

Operating temperature: 0°/60°

SP 15

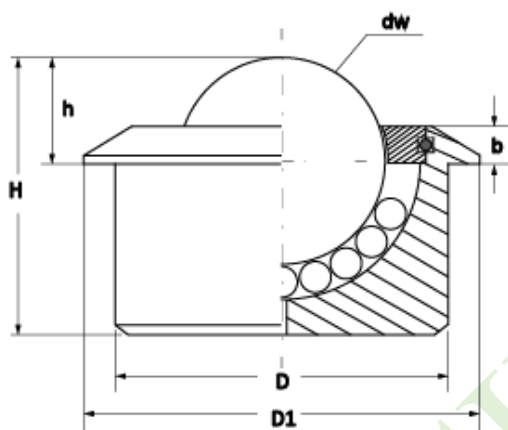

SP 22 - SP 30 - SP 45

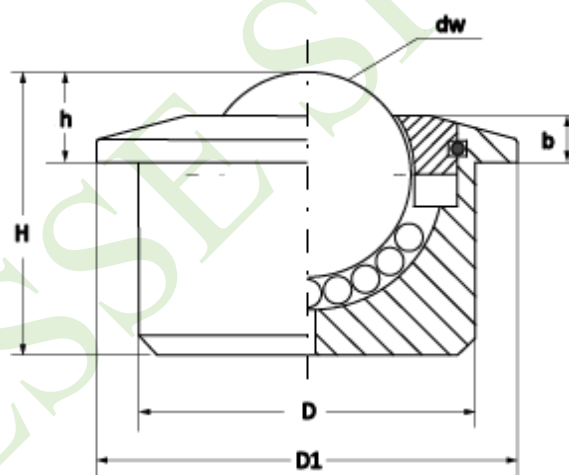

TYPE	CODE	dw	D ± 0,08	D1	h ± 0,2	H ± 0,2	b	Load cap. (Kg.)	Weight (Kg.)	FLEECE
SP 15 DD	10.015.0081	15	24	30	8	20	3	7	0,015	NO
SP 15 DC	10.015.0081	15	24	30	8	20	3	7	0,024	NO
SP 15 DDC	10.015.0081	15	24	30	8	20	3	7	0,012	NO
		dw	D ± 0,08	D1	h ± 0,3	H ± 0,3	b			
SP 22 DD	10.022.0075	22	36	45	9,8	30,5	4,5	10	0,040	NO
SP 22 DC	10.022.0075	22	36	45	9,8	30,5	4,5	10	0,074	NO
SP 22 DDC	10.022.0075	22	36	45	9,8	30,5	4,5	10	0,036	NO
		dw	D ± 0,08	D1	h ± 0,3	H ± 0,3	b			
SP 30 DD	10.030.0051	30	45	55	13,8	36,8	8	15	0,070	NO
SP 30 DC	10.030.0051	30	45	55	13,8	36,8	8	15	0,162	NO
SP 30 DDC	10.030.0051	30	45	55	13,8	36,8	8	15	0,066	NO
		dw	D ± 1,0	D1	h ± 0,4	H ± 0,3	b			
SP 45 DD	10.045.0039	45	62	75	19	53,5	10	20	0,185	NO
SP 45 DC	10.045.0039	45	62	75	19	53,5	10	20	0,502	NO
SP 45 DDC	10.045.0039	45	62	75	19	53,5	10	20	0,176	NO

TYPE	SPECIFICATIONS
DD	Components, main and small support balls in plastic material.
DC	Components in plastic material, main and small support balls in stainless steel AISI 316 L
DDC	Components and main ball in plastic material, small support balls in stainless steel AISI 316 L