


BALL TRANSFER UNITS WITH THREADED SHANK: SP 8 – SP 12 – SP 15 (ON REQUEST WE CARRY OUT ALSO SP 22-30-45 WITH OR WITHOUT FLANGE)

The ball transfer units with “threaded shank” or with screw fixing are carried out in turned steel, machined from bar and hardened, to grant better load capacity and stress resistance.


The threaded shank is machined directly from bar thus ensuring proper resistance and tightness.

The SP 8, SP 12 and the SP 15 in the version with flange (see next page) are carried out with cover in pressed metal sheet while the SP 15 without flange as well as the SP 22, SP 30 and SP 45 are realized with cover in turned steel, machined from bar.


SP 8

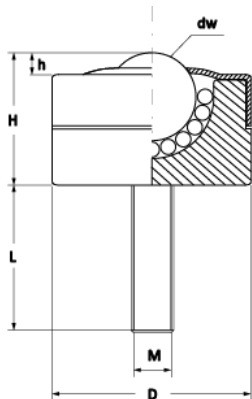

SP 12

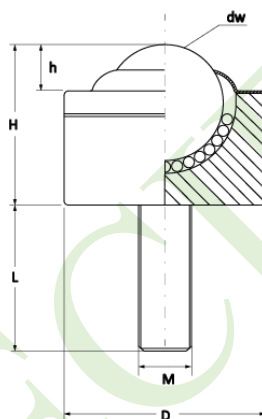


SP 15 without flange

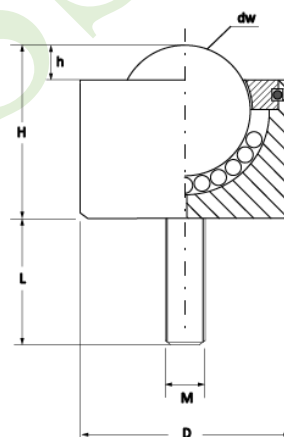

TYPE – without flange	CODE	dw	D	h	H	M	L	Load-cap. (Kg.)	Weight (Kg.)	FLEECE
SP 8 B G.F.M6x15	10.008.0014	8	18 ± 0,08	2 ± 0,2	12 ± 0,2	6	15	10	0,020	NO
SP 8 C G.F.M6x15	10.008.0012	8	18 ± 0,08	2 ± 0,2	12 ± 0,2	6	15	7	0,020	NO
SP 8 BD G.F.M6x15	10.008.0013	8	18 ± 0,08	2 ± 0,2	12 ± 0,2	6	15	2	0,019	NO
SP 12 B G.F.M8x15	10.012.0007	12	22 ± 0,08	5 ± 0,2	17,5 ± 0,2	8	15	20	0,040	NO
SP 12 C G.F.M8x15	10.012.0008	12	22 ± 0,08	5 ± 0,2	17,5 ± 0,2	8	15	15	0,040	NO
SP 12 BD G.F.M8x15	10.012.0009	12	22 ± 0,08	5 ± 0,2	17,5 ± 0,2	8	15	5	0,038	NO
SP 12 B G.F.M8x20	10.012.0020	12	22 ± 0,08	5 ± 0,2	17,5 ± 0,2	8	20	20	0,040	NO
SP 12 C G.F.M8x20	10.012.0021	12	22 ± 0,08	5 ± 0,2	17,5 ± 0,2	8	20	15	0,040	NO
SP 12 BD G.F.M8x20	10.012.0022	12	22 ± 0,08	5 ± 0,2	17,5 ± 0,2	8	20	5	0,038	NO
SP 15 B G.F.M6x10	10.015.0054	15	24 ± 0,08	5 ± 0,2	20 ± 0,2	6	10	50	0,051	NO
SP 15 C G.F.M6x10	10.015.0056	15	24 ± 0,08	5 ± 0,2	20 ± 0,2	6	10	40	0,051	NO
SP 15 BD G.F.M6x10	10.015.0058	15	24 ± 0,08	5 ± 0,2	20 ± 0,2	6	10	13	0,038	NO
SP 15 B G.F.M6x12	10.015.0059	15	24 ± 0,08	5 ± 0,2	20 ± 0,2	6	12	50	0,051	NO
SP 15 C G.F.M6x12	10.015.0061	15	24 ± 0,08	5 ± 0,2	20 ± 0,2	6	12	40	0,051	NO
SP 15 BD G.F.M6x12	10.015.0088	15	24 ± 0,08	5 ± 0,2	20 ± 0,2	6	12	13	0,038	NO

SP 15 WITH FLANGE

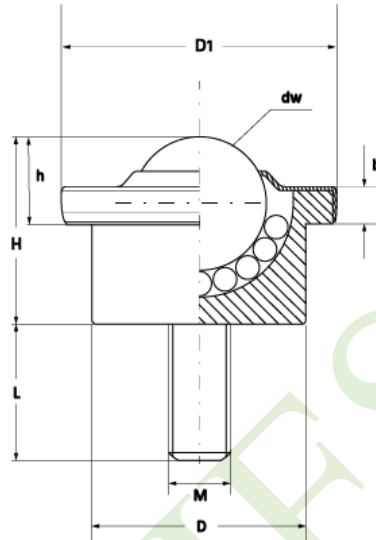

TYPE – with flange	CODE	dw	D	D1	h	H	b	M	L	Load-cap. (Kg.)	Weight (Kg.)	FLEECE
SP 15 B G.F.M8x15	10.015.0007	15	24 ± 0,08	31	9,5 ± 0,2	21 ± 0,2	4	8	15	50	0,065	NO
SP 15 C G.F.M8x15	10.015.0008	15	24 ± 0,08	31	9,5 ± 0,2	21 ± 0,2	4	8	15	40	0,065	NO
SP 15 BD G.F.M8x15	10.015.0009	15	24 ± 0,08	31	9,5 ± 0,2	21 ± 0,2	4	8	15	13	0,050	NO
SP 15 B G.F.M8x20	10.015.0011	15	24 ± 0,08	31	9,5 ± 0,2	21 ± 0,2	4	8	20	50	0,065	NO
SP 15 C G.F.M8x20	10.015.0012	15	24 ± 0,08	31	9,5 ± 0,2	21 ± 0,2	4	8	20	40	0,065	NO
SP 15 BD G.F.M8x20	10.015.0013	15	24 ± 0,08	31	9,5 ± 0,2	21 ± 0,2	4	8	20	13	0,050	NO

TYPE	SPECIFICATIONS
B	Zinc-coated vers. - Chrome steel balls AISI 52100
C	Zinc-coated vers - Stainless steel balls AISI 420 C
BD	Zinc-coated vers. - Main ball in plastic material, small support balls in chrome steel AISI 52100