


FIXING RING – REMOVABLE VERSION

Tipo A – FIXING RING, REMOVABLE VERSION

Insertion hole

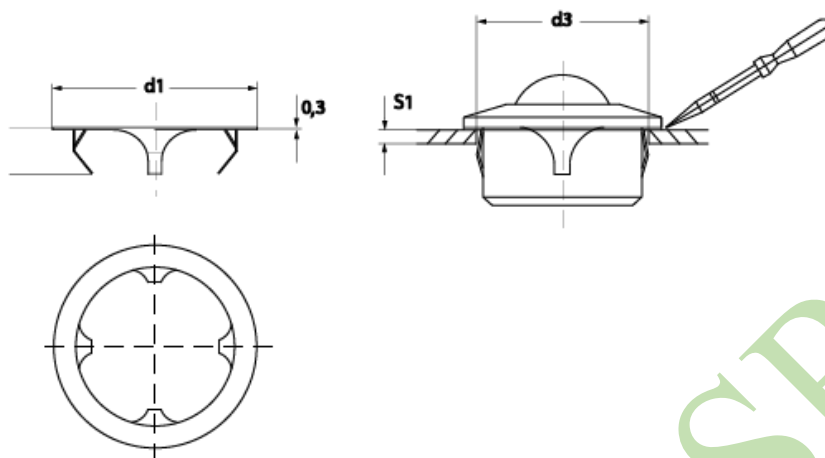


Type	d1	d3	S1
SP – SPL 15	30,50	25 -0,2	2-3mm
SP – SPL 22	44,00	37,3 -0,3	2-4mm
SP – SPL 30	54,80	46,7 -0,4	2-4mm

FIXING RING – FIXED VERSION

Tipo B – FIXING RING, FIXED VERSION

Insertion hole

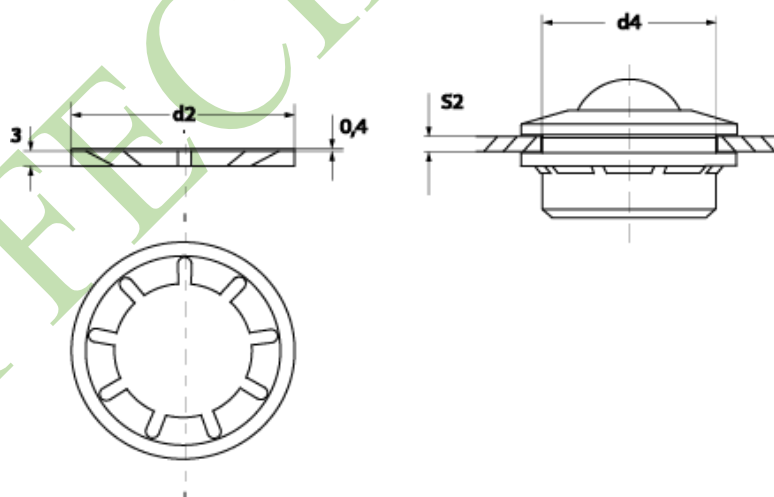

Type	d2	d4	S2
SP 12	36,50	23 -0,2	2-4mm
SP – SPL 15	41,50	25 -0,3	2-6mm
SP – SPL 30	60,00	46 -0,4	2-15mm

TOLERANCE RING

For some versions we also dispose of tolerance rings, fixing elements used to compensate the distance between hole and ball transfer unit. They are made of high-quality spring steel. Contact us for any technical detail.